

 In series


The model is in series and available for the long term.



Specification

Sensor

| | |
|---|----------------------|
| Sensor type | CMOS Color |
| Shutter | Global Shutter |
| Sensor characteristic | Linear |
| Readout mode | - |
| Pixel Class | 5 MP |
| Resolution | 5.10 Mpix |
| Resolution (h x v) | 2472 x 2064 Pixel |
| Aspect ratio | 5.4 |
| ADC | 12 bit |
| Color depth (camera) | 12 bit |
| Optical sensor class | 1/1.8" |
| Optical Size | 6.773 mm x 5.655 mm |
| Optical sensor diagonal | 8.82 mm 1/1.8" |
| Pixel size | 2.74 µm |
| Manufacturer | Sony |
| Sensor Model | IMX547-AAQJ-C |
| Gain (master/RGB) | 16x/16x |
| AOI horizontal | same frame rate |
| AOI vertical | increased frame rate |
| AOI image width / step width | 256 / 2 |
| AOI image height / step width | 2 / 2 |
| AOI position grid (horizontal/vertical) | 2 / 2 |
| Binning horizontal | |
| Binning vertical | |
| Binning method | M/C automatic |
| Binning factor | 1x1 |
| Decimation (subsampling) horizontal | increased frame rate |
| Decimation (subsampling) vertical | increased frame rate |
| Decimation (subsampling) method | M/C automatic |
| Decimation (subsampling) factor | 2x2 |

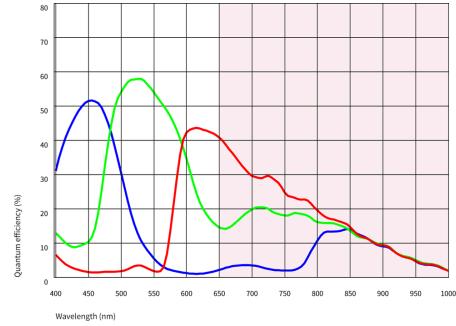

Model

| | |
|-----------------------------------|-------------------|
| Frame rate freerun mode | 24 fps |
| Frame rate trigger (continuous) | 24 fps |
| Frame rate trigger (maximum) | 26 fps |
| Exposure time (minimum - maximum) | 0.02 ms - 2000 ms |
| Long exposure (maximum) | 120000 ms |
| Power consumption | 2 W - 4 W |
| Image memory | 128 MB |

Ambient conditions

The temperature values given below refer to the outer device temperature of the camera housing.


| | |
|---|---------------------------------|
| Allowed device temperature during operation | 0 °C - 55 °C / 32 °F - 131 °F |
| Allowed device temperature during storage | -20 °C - 60 °C / -4 °F - 140 °F |
| Humidity (relative, non-condensing) | 0 % - 100 % |

Connectors

| | |
|---------------------|--|
| Interface connector | GigE M12, screwable |
| I/O connector | 8-pin Binder connector (Binder series 712: 09-0427-020-08) |
| Power supply | 12 V - 24 V or PoE |

Pin assignment I/O connector

| | |
|---|---|
| 1 | Trigger input with optocoupler (+) - Line 0 |
| 2 | Input power supply (VCC) 12-24 V DC |
| 3 | General Purpose I/O (GPIO) 1 - Line 2 |
| 4 | Ground (GND) |
| 5 | Flash output with optocoupler (+) - Line 0 |
| 6 | Flash output with optocoupler (-) - Line 1 |
| 7 | Trigger input with optocoupler (-) - Line 0 |
| 8 | General Purpose I/O (GPIO) 2 |

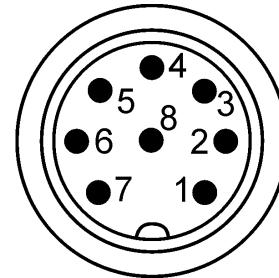

Design

| | |
|------------------|-----------------------------|
| Lens Mount | C-Mount |
| IP code | IP65/67 |
| Dimensions H/W/L | 41.0 mm x 53.0 mm x 42.7 mm |
| Mass | 178 g |
| Housing material | Aluminum |

Features

List of on-camera image pre-processing features.

All features of the table are available via our IDS peak software for image pre-processing on the host computer (sensor model dependent).

| | | |
|-------------------|-----------------------------|---|
| Image Acquisition | Freerun | ✓ |
| | Software trigger | ✓ |
| | Hardware trigger | ✓ |
| | Trigger controlled exposure | ✓ |
| | Denoiser | ✓ |
| | Long exposure | ✓ |
| | Line scan | ✓ |
| Flashing | Flashing | ✓ |
| | PWM flashing | ✓ |

Subject to technical modifications (2026-01-23)

Image Adjustments

| | |
|-------------------|-----|
| Auto exposure | ✓ |
| Auto gain | ✓ |
| Auto whitebalance | ✓ |
| Color correction | ✓ |
| Gamma | ✓ |
| LUT | ✓ |
| Mirror/flip | X/Y |

On-board Image Processing

| | |
|---------------------|---|
| Pixel formats | Mono8 BayerRG8 BayerRG10 BayerRG10p BayerRG12 BayerRG12p BGR8 RGB8 BGR10p32 RGB10p32 |
| Region of interest | ✓ |
| Decimation (FPGA) | ✓ |
| Decimation (Sensor) | 2x2 |
| Binning (FPGA) | ✓ |
| Binning (Sensor) | |

Others

| | |
|--------------------------------|------|
| IP settings | ✓ |
| Bandwidth management | ✓ |
| Chunks | ✓ |
| Sequencer | - |
| PTP | ✓ |
| Firmware update | ✓ |
| 1st supported firmware version | 3.31 |