



Discontinued
The model has been discontinued.




uEye industrial cameras now also work with IDS peak! We recommend the Software Development Kit for the implementation of new projects. [Learn about the process here and switch now.](#)
Please note: The technical data given here was measured using the IDS Software Suite.

Specification

Sensor

| | |
|---|----------------------|
| Sensor type | CMOS Color |
| Shutter | Rolling shutter |
| Sensor characteristic | Linear |
| Readout mode | Progressive scan |
| Pixel Class | 1.9 MP |
| Resolution | 1.92 Mpix |
| Resolution (h x v) | 1600 x 1200 Pixel |
| Aspect ratio | 4:3 |
| ADC | 8 bit |
| Color depth (camera) | 8 bit |
| Optical sensor class | 1/3" |
| Optical Size | 4.480 mm x 3.360 mm |
| Optical sensor diagonal | 5.6 mm (1/2.86") |
| Pixel size | 2.8 µm |
| Manufacturer | Onsemi |
| Sensor Model | MT9D131STC |
| Gain (master/RGB) | 5.8x/3.1x |
| AOI horizontal | increased frame rate |
| AOI vertical | increased frame rate |
| AOI image width / step width | 32 / 4 |
| AOI image height / step width | 4 / 2 |
| AOI position grid (horizontal/vertical) | 4 / 2 |
| Binning horizontal | increased frame rate |
| Binning vertical | increased frame rate |
| Binning method | Color |
| Binning factor | 2 |
| Subsampling horizontal | increased frame rate |
| Subsampling vertical | increased frame rate |
| Subsampling method | Color |
| Subsampling factor | 2, 4, 8, 16 |

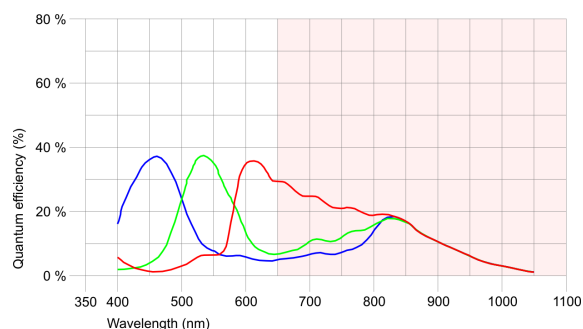

Subject to technical modifications (2025-06-03)

Model

| | |
|-----------------------------------|---------------------|
| Pixel clock range | 5 MHz - 43 MHz |
| Frame rate freerun mode | 18 |
| Frame rate trigger (maximum) | 18 |
| Exposure time (minimum - maximum) | 0.038 ms - 12826 ms |
| Power consumption | 0.5 W - 1.1 W |

Ambient conditions

The temperature values given below refer to the outer device temperature of the camera housing.
For PCB versions, refer to the separate hints in the respective documentation.


| | |
|-------------------------------------|---------------------------------|
| Device temperature during operation | 0 °C - 55 °C / 32 °F - 131 °F |
| Device temperature during storage | -20 °C - 80 °C / -4 °F - 176 °F |
| Humidity (relative, non-condensing) | 20 % - 80 % |

Connectors

| | |
|---------------------|-----------------------------|
| Interface connector | USB 2.0 mini-B |
| I/O connector | 10-pin plated-through holes |
| Power supply | USB cable |

Pin assignment I/O connector

| | |
|----|--|
| 1 | USB Power supply (VCC) 5 V |
| 2 | USB Ground (GND) |
| 3 | Trigger input without optocoupler (+) |
| 4 | Flash output without optocoupler (+) |
| 5 | Power supply (internal voltage transformer), 3.3 V or 3.0 V (sensor-dependent) |
| 6 | USB Ground (GND) |
| 7 | General Purpose I/O (GPIO) 1 |
| 8 | General Purpose I/O (GPIO) 2 |
| 9 | I2C bus clock signal |
| 10 | I2C bus data signal |

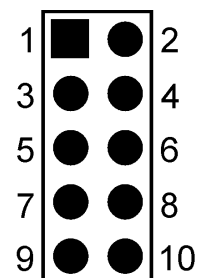

Camera rear view

Design

| | |
|------------------|-----------------------------|
| Lens Mount | S-Mount |
| IP code | - |
| Dimensions H/W/L | 36.0 mm x 36.0 mm x 20.2 mm |
| Mass | 16 g |