



| | | | | | |
|-------------|---|-------|------|------|------------|
| Projection |  | Scale | Free | DATE | 02-13-2026 |
| Drawing No. | IZS40-820-08B | | | | |

IZS40-820-08B(820)

Ionizer

3D View

To activate the interactive 3D view, you must trust this document (see hint on the top) in Adobe Acrobat and click on the question mark.

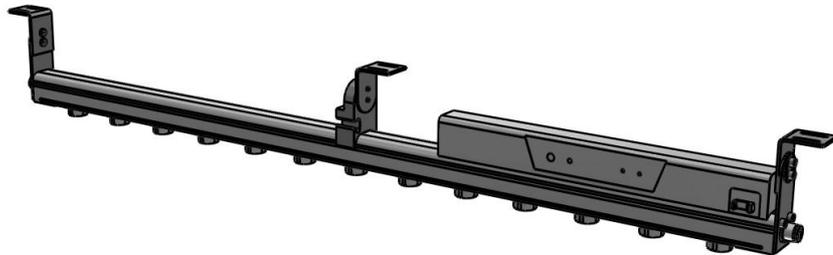

IZS40-820-08B(820)

Ionizer

Technical Data

| | |
|---|---|
| MODEL1 (Model) | (40) Standard type |
| LENGTH (Bar length / mm) | 820 |
| ELECTRODE (Electrode cartridge type/Electrode material) | (-) High speed de-ionizing cartridge/Tungsten |
| IOPUT (Input/Output specifications) | N/A |
| CABLE (Power supply cable) | (-) With power supply cable (3 m) |
| FITTING (One-touch fitting) | (08) Dia 8 one-touch fitting |
| BRACKET (Bracket) | (B) With bracket |
| SENSOR (Sensor) | N/A |
| OMSC (Made to order) | (-) None |