

# QUINT4-PS/1AC/12DC/15 - Power supply



2904608

<https://www.phoenixcontact.com/us/products/2904608>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Primary-switched QUINT POWER power supply with free choice of output characteristic curve, SFB (Selective Fuse Breaking) Technology, and NFC interface, input: 1-phase, output: 12 V DC / 15 A

## Product description

The fourth generation of the high-performance QUINT POWER power supplies ensures superior system availability by means of new functions. Signaling thresholds and characteristic curves can be individually adjusted via the NFC interface. The unique SFB technology and preventive function monitoring of the QUINT POWER power supply increase the availability of your application.

## Your advantages

- Preventive function monitoring indicates critical operating states before errors occur
- Signaling thresholds and characteristic curves that can be adjusted via NFC maximize system availability
- Power reserve for easy system extension thanks to static boost with sustained power of up to 125% and ability to start difficult loads thanks to dynamic boost with up to 200% for 5 seconds
- High degree of immunity, thanks to integrated gas-filled surge arrester and mains failure bridging time of more than 20 milliseconds
- Robust design thanks to metal housing and wide temperature range from -40°C to +70°C
- Worldwide use thanks to the wide range input and international approval package

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 2904608       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales key                            | CM10          |
| Product key                          | CMPI12        |
| GTIN                                 | 4055626355054 |
| Weight per piece (including packing) | 1,156 g       |
| Weight per piece (excluding packing) | 1,138 g       |
| Customs tariff number                | 85044095      |
| Country of origin                    | TH            |

# QUINT4-PS/1AC/12DC/15 - Power supply



2904608

<https://www.phoenixcontact.com/us/products/2904608>

## Technical data

### Input data

|                                  |                                                                            |
|----------------------------------|----------------------------------------------------------------------------|
| Control input (configurable) Rem | Output power ON/OFF (SLEEP MODE)                                           |
| Default                          | Output power ON (>40 k $\Omega$ /24 V DC/open bridge between Rem and SGnd) |

### AC operation

|                                          |                                                                              |
|------------------------------------------|------------------------------------------------------------------------------|
| Nominal input voltage range              | 100 V AC ... 240 V AC                                                        |
| Input voltage range                      | 100 V AC ... 240 V AC -15 % ... +10 %                                        |
| Electric strength, max.                  | 300 V AC 60 s                                                                |
| Typical national grid voltage            | 120 V AC<br>230 V AC                                                         |
| Voltage type of supply voltage           | AC                                                                           |
| Inrush current                           | typ. 15 A (at 25 °C)                                                         |
| Inrush current integral ( $I^2t$ )       | < 0.6 A <sup>2</sup> s                                                       |
| Inrush current limitation                | 15 A (after 1 ms)                                                            |
| AC frequency range                       | 50 Hz ... 60 Hz -10 % ... +10 %                                              |
| Frequency range ( $f_N$ )                | 50 Hz ... 60 Hz -10 % ... +10 %<br>16.7 Hz (acc. to EN 50163)                |
| Mains buffering time                     | typ. 55 ms (120 V AC)<br>typ. 56 ms (230 V AC)                               |
| Current consumption                      | 2.4 A (100 V AC)<br>1.9 A (120 V AC)<br>1.1 A (230 V AC)<br>1.1 A (240 V AC) |
| Nominal power consumption                | 221 VA                                                                       |
| Protective circuit                       | Transient surge protection; Varistor, gas-filled surge arrester              |
| Switch-on time                           | < 1 s                                                                        |
| Typical response time                    | 300 ms (from SLEEP MODE)                                                     |
| Input fuse                               | 8 A (slow-blow, internal)                                                    |
| Recommended breaker for input protection | 10 A ... 16 A (Characteristic B, C, D, K or comparable)                      |
| Discharge current to PE                  | < 3.5 mA<br>0.7 mA (264 V AC, 60 Hz)                                         |

### DC operation

|                                |                                       |
|--------------------------------|---------------------------------------|
| Nominal input voltage range    | 110 V DC ... 250 V DC                 |
| Input voltage range            | 110 V DC ... 250 V DC -18 % ... +40 % |
| Voltage type of supply voltage | DC                                    |
| Current consumption            | 2.2 A (110 V DC)<br>1 A (250 V DC)    |

### Output data

|            |                        |
|------------|------------------------|
| Efficiency | typ. 91.2 % (120 V AC) |
|------------|------------------------|

# QUINT4-PS/1AC/12DC/15 - Power supply



2904608

<https://www.phoenixcontact.com/us/products/2904608>

|                                                    |                                                                   |
|----------------------------------------------------|-------------------------------------------------------------------|
|                                                    | typ. 92 % (230 V AC)                                              |
| Nominal output voltage                             | 12 V DC                                                           |
| Setting range of the output voltage ( $U_{Set}$ )  | 12 V DC ... 15 V DC (constant capacity)                           |
| Nominal output current ( $I_N$ )                   | 15 A                                                              |
| Static Boost ( $I_{Stat.Boost}$ )                  | 17.5 A                                                            |
| Dynamic Boost ( $I_{Dyn.Boost}$ )                  | 20 A (5 s)                                                        |
| Selective Fuse Breaking ( $I_{SFB}$ )              | 60 A (15 ms)                                                      |
| Magnetic circuit breaker tripping                  | A1...A6 / B2...B6 / C1...C2 / Z1...Z6                             |
| Derating                                           | > 60 °C ... 70 °C (2.5 %/K)                                       |
| Feedback voltage resistance                        | ≤ 25 V DC                                                         |
| Protection against overvoltage at the output (OVP) | ≤ 18 V DC                                                         |
| Control deviation                                  | < 0.5 % (Static load change 10 % ... 90 %)                        |
|                                                    | < 4 % (Dynamic load change 10 % ... 90 %, (10 Hz))                |
|                                                    | < 0.25 % (change in input voltage ±10 %)                          |
| Residual ripple                                    | < 70 mV <sub>PP</sub> (with nominal values)                       |
| Short-circuit-proof                                | yes                                                               |
| No-load proof                                      | yes                                                               |
| Output power                                       | 180 W                                                             |
|                                                    | 210 W                                                             |
|                                                    | 240 W                                                             |
| Apparent power                                     | 660 VA (120 V, $U_{OUT} = 12$ V, $I_{OUT} = \text{stat. boost}$ ) |
|                                                    | 644 VA ()                                                         |
| Maximum no-load power dissipation                  | < 4 W (120 V AC)                                                  |
|                                                    | < 4 W (230 V AC)                                                  |
| Power loss nominal load max.                       | < 18 W (120 V AC)                                                 |
|                                                    | < 16 W (230 V AC)                                                 |
| Power dissipation SLEEP MODE                       | < 4 W (120 V AC)                                                  |
|                                                    | < 4 W (230 V AC)                                                  |
| Crest factor                                       | typ. 1.58 (120 V AC)                                              |
|                                                    | typ. 1.59 (230 V AC)                                              |
| Rise time                                          | < 1 s ( $U_{Out} = 10$ % ... 90 %)                                |
| Connection in parallel                             | yes, for redundancy and increased capacity                        |
| Connection in series                               | yes                                                               |

## Signal

|                    |                                             |
|--------------------|---------------------------------------------|
| Signal ground SGnd | Reference potential for Out1, Out2, and Rem |
|--------------------|---------------------------------------------|

## Signal Out 1 (configurable)

|         |                                                          |
|---------|----------------------------------------------------------|
| Digital | 24 V DC 20 mA                                            |
| Default | 24 V DC 20 mA 24 V DC for $U_{Out} > 0.9 \times U_{Set}$ |

## Signal Out 2 (configurable)

|         |                                           |
|---------|-------------------------------------------|
| Digital | 24 V DC 20 mA                             |
| Analog  | 4 mA ... 20 mA ±5 % (Load ≤400 Ω)         |
| Default | 24 V DC 20 mA 24 V DC for $P_{Out} < P_N$ |

# QUINT4-PS/1AC/12DC/15 - Power supply



2904608

<https://www.phoenixcontact.com/us/products/2904608>

## Signal relay 13/14 (configurable)

|         |                                    |
|---------|------------------------------------|
| Default | closed ( $U_{out} > 0.9 U_{Set}$ ) |
| Digital | 24 V DC 1 A                        |
|         | 30 V AC/DC 0.5 A                   |

## Connection data

### Input

|                                                                                    |                      |
|------------------------------------------------------------------------------------|----------------------|
| Connection method                                                                  | Screw connection     |
| Conductor cross-section, rigid min.                                                | 0.2 mm <sup>2</sup>  |
| Conductor cross-section, rigid max.                                                | 2.5 mm <sup>2</sup>  |
| Conductor cross-section flexible min.                                              | 0.2 mm <sup>2</sup>  |
| Conductor cross-section flexible max.                                              | 2.5 mm <sup>2</sup>  |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, min.    | 0.25 mm <sup>2</sup> |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, max.    | 2.5 mm <sup>2</sup>  |
| Single conductor/flexible terminal point with ferrule without plastic sleeve, min. | 0.25 mm <sup>2</sup> |
| Single conductor/flexible terminal point with ferrule without plastic sleeve, max. | 2.5 mm <sup>2</sup>  |
| Conductor cross-section AWG min.                                                   | 24                   |
| Conductor cross-section AWG max.                                                   | 14                   |
| Stripping length                                                                   | 6.5 mm               |
| Tightening torque, min                                                             | 0.5 Nm               |
| Tightening torque max                                                              | 0.6 Nm               |

### Output

|                                                                                    |                      |
|------------------------------------------------------------------------------------|----------------------|
| Connection method                                                                  | Screw connection     |
| Conductor cross-section, rigid min.                                                | 0.2 mm <sup>2</sup>  |
| Conductor cross-section, rigid max.                                                | 2.5 mm <sup>2</sup>  |
| Conductor cross-section flexible min.                                              | 0.2 mm <sup>2</sup>  |
| Conductor cross-section flexible max.                                              | 2.5 mm <sup>2</sup>  |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, min.    | 0.25 mm <sup>2</sup> |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, max.    | 2.5 mm <sup>2</sup>  |
| Single conductor/flexible terminal point with ferrule without plastic sleeve, min. | 0.25 mm <sup>2</sup> |
| Single conductor/flexible terminal point with ferrule without plastic sleeve, max. | 2.5 mm <sup>2</sup>  |
| Conductor cross-section AWG min.                                                   | 24                   |
| Conductor cross-section AWG max.                                                   | 14                   |
| Stripping length                                                                   | 6.5 mm               |
| Tightening torque, min                                                             | 0.5 Nm               |
| Tightening torque max                                                              | 0.6 Nm               |

# QUINT4-PS/1AC/12DC/15 - Power supply



2904608

<https://www.phoenixcontact.com/us/products/2904608>

## Signal

|                                                                                    |                      |
|------------------------------------------------------------------------------------|----------------------|
| Connection method                                                                  | Push-in connection   |
| Conductor cross-section, rigid min.                                                | 0.2 mm <sup>2</sup>  |
| Conductor cross-section, rigid max.                                                | 1 mm <sup>2</sup>    |
| Conductor cross-section flexible min.                                              | 0.2 mm <sup>2</sup>  |
| Conductor cross-section flexible max.                                              | 1.5 mm <sup>2</sup>  |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, min.    | 0.2 mm <sup>2</sup>  |
| Single conductor/flexible terminal point with ferrule with plastic sleeve, max.    | 0.75 mm <sup>2</sup> |
| Single conductor/flexible terminal point with ferrule without plastic sleeve, min. | 0.2 mm <sup>2</sup>  |
| Single conductor/flexible terminal point with ferrule without plastic sleeve, max. | 1.5 mm <sup>2</sup>  |
| Conductor cross-section AWG min.                                                   | 24                   |
| Conductor cross-section AWG max.                                                   | 16                   |
| Stripping length                                                                   | 8 mm                 |

## Signaling

|                    |                                                   |
|--------------------|---------------------------------------------------|
| Types of signaling | LED                                               |
|                    | Floating signal contact                           |
|                    | Active signal output Out1 (digital, configurable) |
|                    | Active signal output Out2 (analog, configurable)  |
|                    | Remote contact                                    |
|                    | Signal ground SGnd                                |

## Signal output

|                  |                                                      |
|------------------|------------------------------------------------------|
| P <sub>Out</sub> | > 100 % (LED lights up yellow, output power > 180 W) |
|                  | > 75 % (LED lights up green, output power > 135 W)   |
|                  | > 50 % (LED lights up green, output power > 90 W)    |
| U <sub>Out</sub> | > 0.9 x U <sub>Set</sub> (LED lights up green)       |
|                  | < 0.9 x U <sub>Set</sub> (LED flashes green)         |

## Electrical properties

|                                 |                                                      |
|---------------------------------|------------------------------------------------------|
| Number of phases                | 1                                                    |
| Insulation voltage input/output | 4 kV AC (type test)                                  |
|                                 | 2 kV AC (routine test)                               |
| Insulation voltage output / PE  | 0.5 kV DC (type test)                                |
|                                 | 0.5 kV DC (routine test)                             |
| Insulation voltage input / PE   | 3.5 kV AC (type test)                                |
|                                 | 2.4 kV AC (routine test)                             |
| Switching frequency             | 90.00 kHz ... 110.00 kHz (Auxiliary converter stage) |
|                                 | 52.00 kHz ... 260.00 kHz (Main converter stage)      |
|                                 | 35.00 kHz ... 700.00 kHz (PFC stage)                 |

# QUINT4-PS/1AC/12DC/15 - Power supply



2904608

<https://www.phoenixcontact.com/us/products/2904608>

## Product properties

|                                    |                           |
|------------------------------------|---------------------------|
| Product type                       | Power supply              |
| Product family                     | QUINT POWER               |
| MTBF (IEC 61709, SN 29500)         | > 1196000 h (25 °C)       |
|                                    | > 749000 h (40 °C)        |
|                                    | > 355000 h (60 °C)        |
| Environmental protection directive | RoHS Directive 2011/65/EU |
|                                    | WEEE                      |
|                                    | Reach                     |

## Insulation characteristics

|                     |   |
|---------------------|---|
| Protection class    | I |
| Degree of pollution | 2 |

## Life expectancy (electrolytic capacitors)

|                 |          |
|-----------------|----------|
| Current         | 7.5 A    |
| Temperature     | 40 °C    |
| Time            | 290000 h |
| Additional text | 120 V AC |

## Life expectancy (electrolytic capacitors)

|                 |          |
|-----------------|----------|
| Current         | 7.5 A    |
| Temperature     | 40 °C    |
| Time            | 288000 h |
| Additional text | 230 V AC |

## Life expectancy (electrolytic capacitors)

|                 |          |
|-----------------|----------|
| Current         | 15 A     |
| Temperature     | 25 °C    |
| Time            | 303000 h |
| Additional text | 120 V AC |

## Life expectancy (electrolytic capacitors)

|                 |          |
|-----------------|----------|
| Current         | 15 A     |
| Temperature     | 25 °C    |
| Time            | 331000 h |
| Additional text | 230 V AC |

## Life expectancy (electrolytic capacitors)

|                 |          |
|-----------------|----------|
| Current         | 15 A     |
| Temperature     | 40 °C    |
| Time            | 107000 h |
| Additional text | 120 V AC |

## Life expectancy (electrolytic capacitors)

|         |      |
|---------|------|
| Current | 15 A |
|---------|------|

# QUINT4-PS/1AC/12DC/15 - Power supply




2904608

<https://www.phoenixcontact.com/us/products/2904608>

|                 |          |
|-----------------|----------|
| Temperature     | 40 °C    |
| Time            | 117000 h |
| Additional text | 230 V AC |

## Dimensions

|                     |                                                                                    |
|---------------------|------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width               | 50 mm                                                                              |
| Height              | 130 mm                                                                             |
| Depth               | 125 mm                                                                             |

### Installation dimensions

|                                  |               |
|----------------------------------|---------------|
| Installation distance right/left | 5 mm / 5 mm   |
| Installation distance top/bottom | 50 mm / 50 mm |

### Alternative assembly

|        |        |
|--------|--------|
| Width  | 122 mm |
| Height | 130 mm |
| Depth  | 53 mm  |

## Mounting

|                         |                                                                                                                                                                                                 |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mounting type           | DIN rail: 35 mm                                                                                                                                                                                 |
| Assembly note           | alignable: $P_N \geq 50\%$ , 5 mm horizontally, 15 mm next to active components, 50 mm vertically<br>alignable: $P_N < 50\%$ , 0 mm horizontally, 40 mm vertically top, 20 mm vertically bottom |
| Mounting position       | horizontal DIN rail NS 35, EN 60715                                                                                                                                                             |
| With protective coating | no                                                                                                                                                                                              |

## Material specifications

|                                                                    |                        |
|--------------------------------------------------------------------|------------------------|
| Flammability rating according to UL 94 (housing / terminal blocks) | V0                     |
| Housing material                                                   | Metal                  |
| Hood version                                                       | Stainless steel X6Cr17 |
| Side element version                                               | Aluminum               |

## Environmental and real-life conditions

### Ambient conditions

|                                         |                                              |
|-----------------------------------------|----------------------------------------------|
| Degree of protection                    | IP20                                         |
| Ambient temperature (operation)         | -25 °C ... 70 °C (> 60 °C Derating: 2,5 %/K) |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C                             |

# QUINT4-PS/1AC/12DC/15 - Power supply



2904608

<https://www.phoenixcontact.com/us/products/2904608>

|                                                |                                                                                                                 |
|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| Ambient temperature (start-up type tested)     | -40 °C                                                                                                          |
| Maximum altitude                               | ≤ 5000 m (> 2000 m, observe derating)                                                                           |
| Climatic class                                 | 3K3 (in acc. with EN 60721)                                                                                     |
| Max. permissible relative humidity (operation) | ≤ 95 % (at 25 °C, non-condensing)                                                                               |
| Shock                                          | 18 ms, 30g, in each space direction (according to IEC 60068-2-27)                                               |
| Vibration (operation)                          | 5 Hz ... 100 Hz resonance search 2.3g, 90 min., resonance frequency 2.3g, 90 min. (according to DNV GL Class C) |
| Temp code                                      | T4 (-25 ... +70 °C; > 60 °C, Derating: 2,5 %/K)                                                                 |

## Standards and regulations

|                                                                                        |                                    |
|----------------------------------------------------------------------------------------|------------------------------------|
| Rail applications                                                                      | EN 50121-3-2                       |
|                                                                                        | EN 50121-4                         |
|                                                                                        | EN 50121-5                         |
|                                                                                        | IEC 62236-3-2                      |
|                                                                                        | IEC 62236-4                        |
|                                                                                        | IEC 62236-5                        |
| HART FSK Physical Layer Test Specification Compliance                                  | Output voltage $U_{Out}$ compliant |
| Standard – Limitation of mains harmonic currents                                       | EN 61000-3-2                       |
| Standard - Electrical safety                                                           | IEC 61010-2-201 (SELV)             |
| Standard – Safety extra-low voltage                                                    | IEC 61010-1 (SELV)                 |
|                                                                                        | IEC 61010-2-201 (PELV)             |
| Standard - Safe isolation                                                              | IEC 61558-2-16                     |
|                                                                                        | IEC 61010-2-201                    |
| Standard - safety for equipment for measurement, control, and laboratory use           | IEC 61010-1                        |
| Standard - Safety of transformers                                                      | EN 61558-2-16                      |
| Battery charging                                                                       | DIN 41773-1                        |
| Approval - requirement of the semiconductor industry with regard to mains voltage dips | SEMI F47-0706, EN 61000-4-11       |

### Overvoltage category

|            |                |
|------------|----------------|
| EN 61010-1 | II (≤ 5000 m)  |
| EN 62477-1 | III (≤ 2000 m) |

## Approvals

|              |                                                                                     |
|--------------|-------------------------------------------------------------------------------------|
| CSA          | CAN/CSA-C22.2 No. 60950-1-07                                                        |
|              | CSA-C22.2 No. 107.1-01                                                              |
| UL approvals | UL Listed UL 508                                                                    |
|              | UL/C-UL Recognized UL 60950-1                                                       |
|              | UL ANSI/ISA-12.12.01 Class I, Division 2, Groups A, B, C, D T4 (Hazardous Location) |

## EMC data

|                               |                                                   |
|-------------------------------|---------------------------------------------------|
| Electromagnetic compatibility | Conformance with EMC Directive 2014/30/EU         |
| Low Voltage Directive         | Conformance with Low Voltage Directive 2014/35/EC |

# QUINT4-PS/1AC/12DC/15 - Power supply



2904608

<https://www.phoenixcontact.com/us/products/2904608>

|                                     |                                  |
|-------------------------------------|----------------------------------|
| EMC requirements for noise emission | EN 61000-6-3                     |
|                                     | EN 61000-6-4                     |
| EMC requirements for noise immunity | EN 61000-6-1                     |
|                                     | EN 61000-6-2                     |
| EMC requirements for power supply   | IEC 61850-3 (G,H)                |
|                                     | EN 61000-6-5 (switching devices) |

## Conducted noise emission

|                       |                        |
|-----------------------|------------------------|
| Standards/regulations | EN 55016               |
|                       | EN 61000-6-3 (Class B) |

## Noise emission

|                       |                                                                                                       |
|-----------------------|-------------------------------------------------------------------------------------------------------|
| Standards/regulations | Additional basic standard EN 61000-6-5 (immunity in switching devices), IEC/EN 61850-3 (power supply) |
|-----------------------|-------------------------------------------------------------------------------------------------------|

## Noise emission

|                       |                        |
|-----------------------|------------------------|
| Standards/regulations | EN 55016               |
|                       | EN 61000-6-3 (Class B) |

## Harmonic currents

|                       |                        |
|-----------------------|------------------------|
| Standards/regulations | EN 61000-3-2           |
|                       | EN 61000-3-2 (Class A) |
| Frequency range       | 0 kHz ... 2 kHz        |

## Flicker

|                       |                 |
|-----------------------|-----------------|
| Standards/regulations | EN 61000-3-3    |
|                       | EN 61000-3-3    |
| Frequency range       | 0 kHz ... 2 kHz |

## Electrostatic discharge

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-2 |
|-----------------------|--------------|

## Electrostatic discharge

|                   |                      |
|-------------------|----------------------|
| Contact discharge | 8 kV (Test Level 4)  |
| Discharge in air  | 15 kV (Test Level 4) |
| Comments          | Criterion A          |

## Electromagnetic HF field

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-3 |
|-----------------------|--------------|

## Electromagnetic HF field

|                     |                       |
|---------------------|-----------------------|
| Frequency range     | 80 MHz ... 1 GHz      |
| Test field strength | 20 V/m (Test Level 3) |
| Frequency range     | 1 GHz ... 6 GHz       |
| Test field strength | 10 V/m (Test Level 3) |
| Frequency range     | 1 GHz ... 6 GHz       |
| Test field strength | 10 V/m (Test Level 3) |
| Comments            | Criterion A           |

# QUINT4-PS/1AC/12DC/15 - Power supply



2904608

<https://www.phoenixcontact.com/us/products/2904608>

## Fast transients (burst)

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-4 |
|-----------------------|--------------|

## Fast transients (burst)

|          |                                    |
|----------|------------------------------------|
| Input    | 4 kV (Test Level 4 - asymmetrical) |
| Output   | 4 kV (Test Level 4 - asymmetrical) |
| Signal   | 4 kV (Test Level 4 - asymmetrical) |
| Comments | Criterion A                        |

## Surge voltage load (surge)

|          |                                    |
|----------|------------------------------------|
| Input    | 3 kV (Test Level 4 - symmetrical)  |
|          | 6 kV (Test Level 4 - asymmetrical) |
| Output   | 0.5 V (Test Level 2 - symmetrical) |
|          | 2 kV (Test Level 3 - asymmetrical) |
| Signal   | 4 kV (Test Level 4 - asymmetrical) |
| Comments | Criterion A                        |

## Conducted interference

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-6 |
|-----------------------|--------------|

## Conducted interference

|                     |                     |
|---------------------|---------------------|
| Input/output/signal | asymmetrical        |
| Frequency range     | 0.15 MHz ... 80 MHz |
| Comments            | Criterion A         |
| Voltage             | 10 V (Test Level 3) |

## Power frequency magnetic field

|                       |                 |
|-----------------------|-----------------|
| Standards/regulations | EN 61000-4-8    |
| Frequency             | 16.7 Hz         |
|                       | 50 Hz           |
|                       | 60 Hz           |
| Test field strength   | 100 A/m         |
| Additional text       | 60 s            |
| Comments              | Criterion A     |
| Frequency             | 50 Hz           |
|                       | 60 Hz           |
| Frequency range       | 50 Hz ... 60 Hz |
| Test field strength   | 1 kA/m          |
| Additional text       | 3 s             |
| Frequency             | 0 Hz            |
| Test field strength   | 300 A/m         |
| Additional text       | DC, 60 s        |

## Voltage dips

|                       |               |
|-----------------------|---------------|
| Standards/regulations | EN 61000-4-11 |
| Voltage               | 230 V AC      |

# QUINT4-PS/1AC/12DC/15 - Power supply



2904608

<https://www.phoenixcontact.com/us/products/2904608>

|                   |                                                                  |
|-------------------|------------------------------------------------------------------|
| Frequency         | 50 Hz                                                            |
| Voltage dip       | 70 %                                                             |
| Number of periods | 0.5 / 1 / 25 periods                                             |
| Additional text   | Test Level 2                                                     |
| Comments          | Criterion A: 0.5 / 1 / 25 periods                                |
| Voltage dip       | 40 %                                                             |
| Number of periods | 5 / 10 / 50 periods                                              |
| Additional text   | Test Level 2                                                     |
| Comments          | Criterion A                                                      |
| Voltage dip       | 0 %                                                              |
| Number of periods | 0,5 / 1 / 5 / 50 / 250 periods                                   |
| Additional text   | Test Level 2                                                     |
| Comments          | Criterion A: 0.5 / 1 period<br>Criterion B: 5 / 50 / 250 periods |

## Pulse-shape magnetic field

|                       |              |
|-----------------------|--------------|
| Standards/regulations | EN 61000-4-9 |
| Test field strength   | 1000 A/m     |
| Comments              | Criterion A  |

## Attenuated sinusoidal oscillations (ring wave)

|                       |                                                                         |
|-----------------------|-------------------------------------------------------------------------|
| Standards/regulations | EN 61000-4-12                                                           |
| Input                 | 2 kV (Test Level 4 - symmetrical)<br>4 kV (Test Level 4 - asymmetrical) |
| Comments              | Criterion A                                                             |

## Asymmetrical conducted disturbance variables

|                       |                                    |
|-----------------------|------------------------------------|
| Standards/regulations | EN 61000-4-16                      |
| Test level 1          | 15 Hz 150 Hz (Test Level 4)        |
| Voltage               | 30 V 3 V                           |
| Test level 2          | 150 Hz 1.5 kHz (Test Level 4)      |
| Voltage               | 3 V                                |
| Test level 3          | 1.5 kHz 15 kHz (Test Level 4)      |
| Voltage               | 3 V 30 V                           |
| Test level 4          | 15 kHz 150 kHz (Test Level 4)      |
| Voltage               | 30 V                               |
| Test level 5          | 16.7 Hz 50 Hz 60 Hz (Test Level 4) |
| Voltage               | 30 V (Permanent)                   |
| Test level 6          | 16.7 Hz 50 Hz 60 Hz (Test Level 4) |
| Voltage               | 300 V (1 s)                        |
| Comments              | Criterion A                        |

## Attenuated oscillating wave

|                              |                                            |
|------------------------------|--------------------------------------------|
| Standards/regulations        | EN 61000-4-18                              |
| Input, output (test level 1) | 100 kHz 1 MHz (Test Level 3 - symmetrical) |
| Voltage                      | 1 kV                                       |

# QUINT4-PS/1AC/12DC/15 - Power supply



2904608

<https://www.phoenixcontact.com/us/products/2904608>

|                              |                                             |
|------------------------------|---------------------------------------------|
| Input, output (test level 2) | 10 MHz                                      |
| Voltage                      | 1 kV                                        |
| Input, output (test level 3) | 100 kHz 1 MHz (Test Level 3 - asymmetrical) |
| Voltage                      | 2.5 kV                                      |
| Signals (test level 1)       | 100 kHz 1 MHz (Test Level 3 - symmetrical)  |
| Voltage                      | 1 kV                                        |
| Signals (test level 2)       | 100 kHz 1 MHz (Test Level 3 - asymmetrical) |
| Voltage                      | 2.5 kV                                      |
| Comments                     | Criterion A                                 |

## Attenuated oscillating magnetic field

|                       |               |
|-----------------------|---------------|
| Standards/regulations | EN 61000-4-10 |
| Test field strength   | 110 A/m       |
| Test level 1          | 100 kHz       |
| Test field strength   | 110 A/m       |
| Test level 2          | 1 MHz         |
| Comments              | Criterion A   |

## Criteria

|             |                                                                                                                                                            |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Criterion A | Normal operating behavior within the specified limits.                                                                                                     |
| Criterion B | Temporary impairment to operational behavior that is corrected by the device itself.                                                                       |
| Criterion C | Temporary adverse effects on the operating behavior, which the device corrects automatically or which can be restored by actuating the operating elements. |

# QUINT4-PS/1AC/12DC/15 - Power supply


2904608

<https://www.phoenixcontact.com/us/products/2904608>




## Drawings



Dimensional drawing


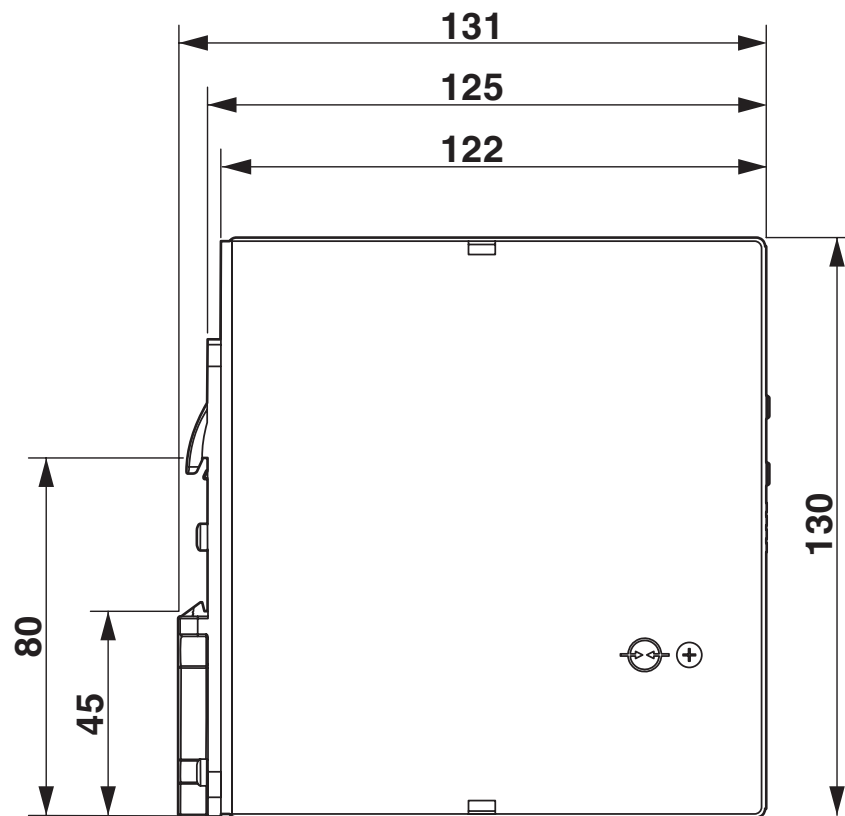


Schematic diagram

## Housing

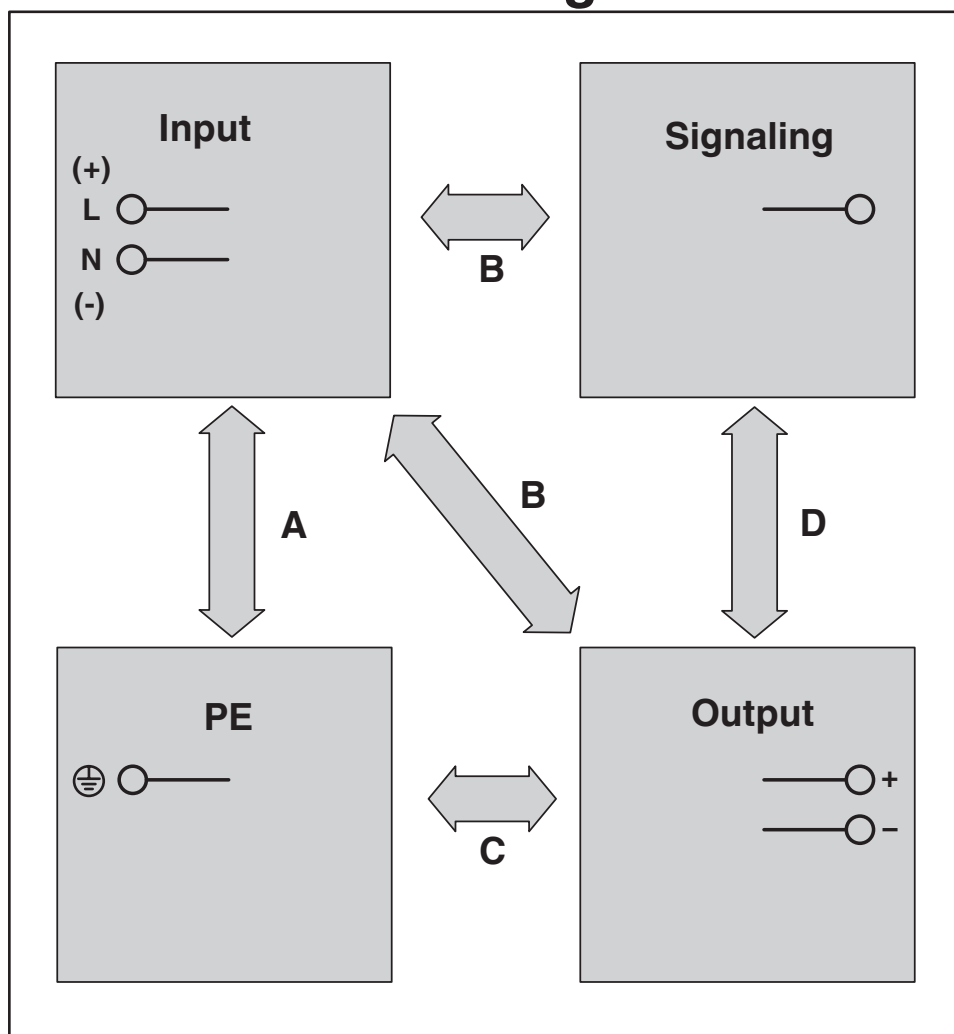

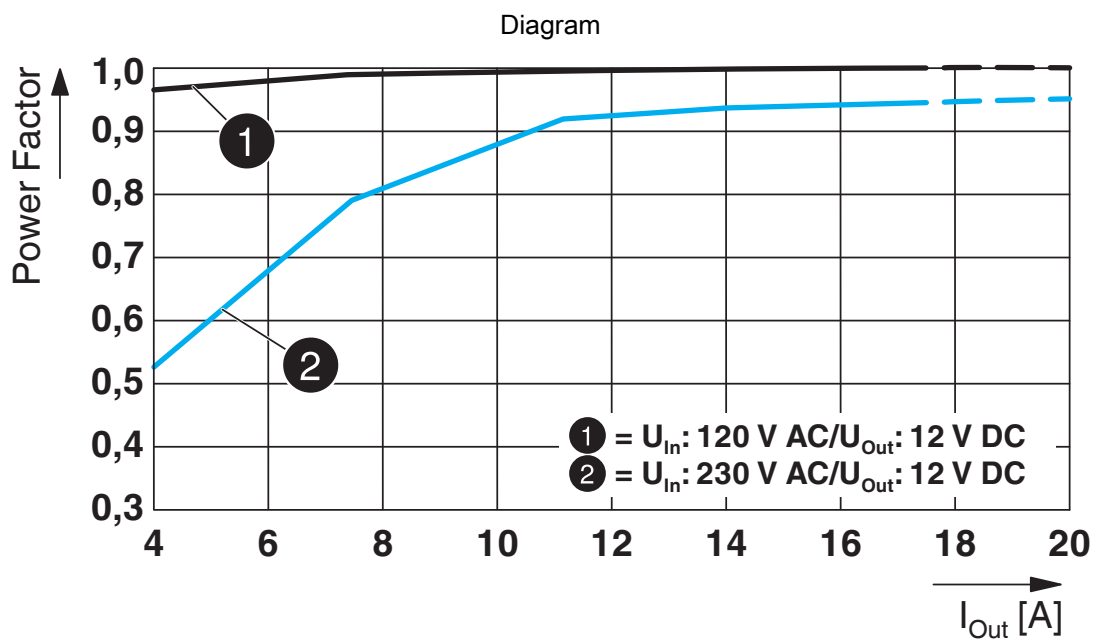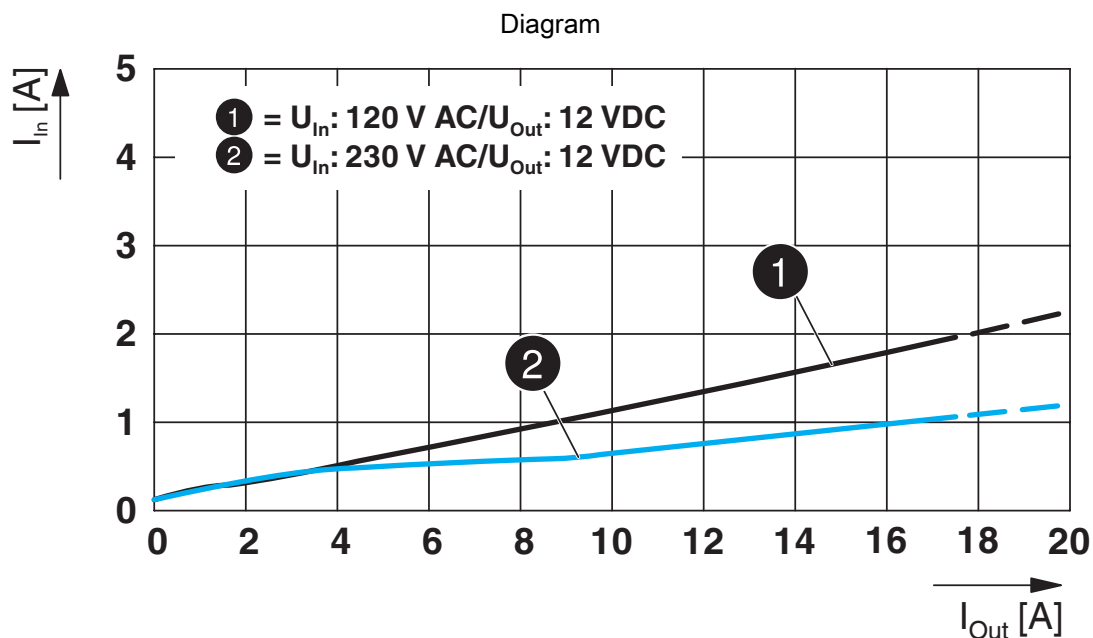

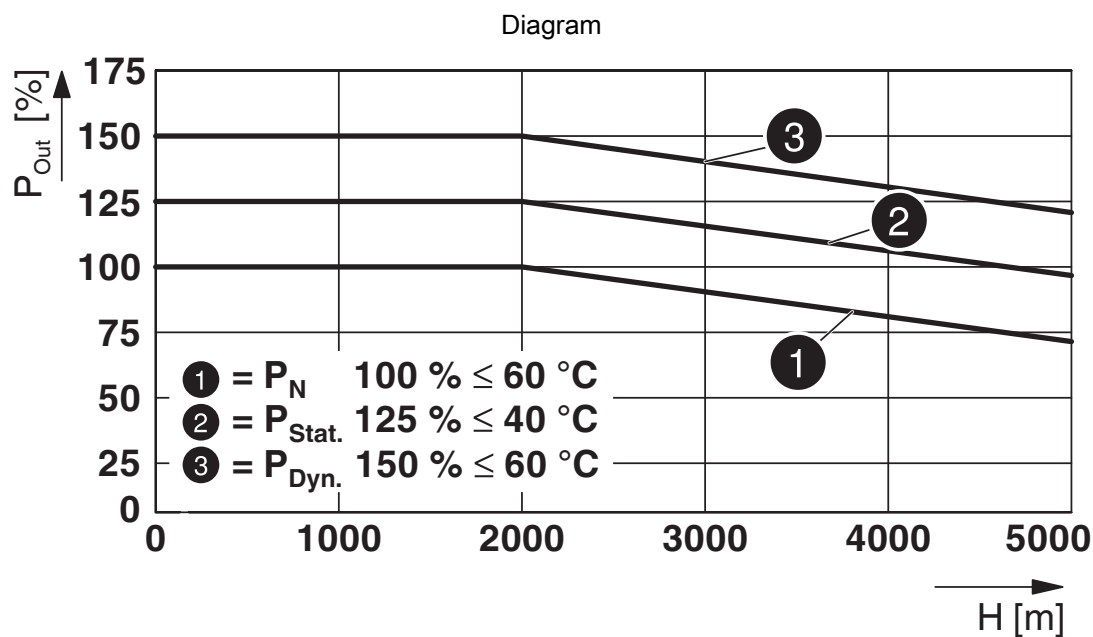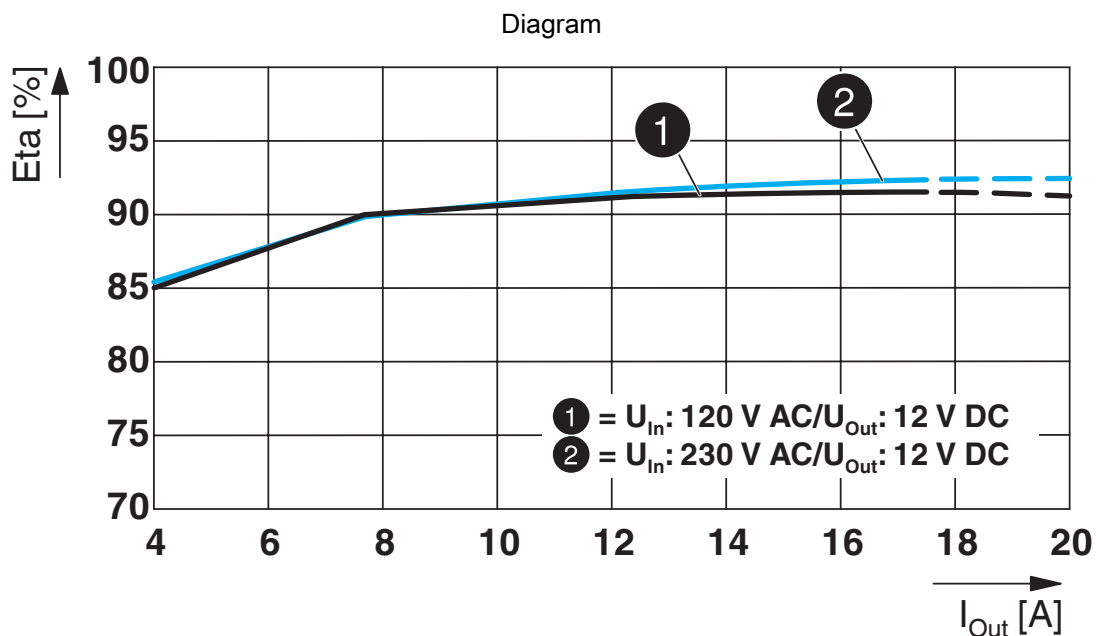


# QUINT4-PS/1AC/12DC/15 - Power supply

2904608

<https://www.phoenixcontact.com/us/products/2904608>



Block diagram

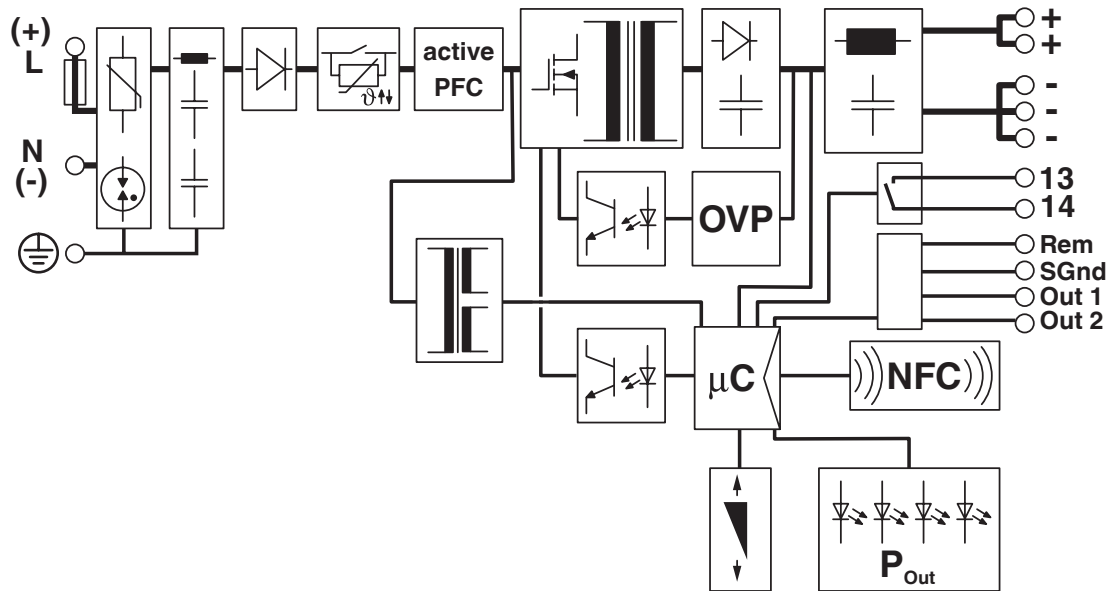

# QUINT4-PS/1AC/12DC/15 - Power supply



2904608

<https://www.phoenixcontact.com/us/products/2904608>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2904608>



**cUL Recognized**

Approval ID: E211944



**UL Recognized**

Approval ID: E211944



**IECEE CB Scheme**

Approval ID: SI-8857



**EAC**

Approval ID: RU S-DE.BL08.W.00764



**LR**

Approval ID: LR22472797TA



**NK**

Approval ID: TA21182M



**UL Listed**

Approval ID: E123528



**cUL Listed**

Approval ID: FILE E 123528

**ABS**

Approval ID: 20-1973616-PDA



**EAC**

Approval ID: RU S-DE.BL08.W.00764

**DNV**

Approval ID: TAA00000BV

# QUINT4-PS/1AC/12DC/15 - Power supply



2904608

<https://www.phoenixcontact.com/us/products/2904608>



**BV**

Approval ID: 44621/B0 BV



**cCSAus**

Approval ID: 70176603

**SEMI F47**

Approval ID: SEMI F47



**cUL Listed**

Approval ID: E199827



**UL Listed**

Approval ID: E199827

# QUINT4-PS/1AC/12DC/15 - Power supply



2904608

<https://www.phoenixcontact.com/us/products/2904608>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27040701 |
| ECLASS-15.0 | 27040701 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC002540 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121000 |
|-------------|----------|

Environmental product compliance

|                                         |                                                                                                                                                                                                                                   |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS                                 |                                                                                                                                                                                                                                   |
| Fulfills EU RoHS substance requirements | Yes                                                                                                                                                                                                                               |
| Exemption                               | 7(a), 7(c)-I                                                                                                                                                                                                                      |
| China RoHS                              |                                                                                                                                                                                                                                   |
| Environment friendly use period (EFUP)  | EFUP-25                                                                                                                                                                                                                           |
|                                         | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |
| EU REACH SVHC                           |                                                                                                                                                                                                                                   |
| REACH candidate substance (CAS No.)     | Lead(CAS: 7439-92-1)                                                                                                                                                                                                              |
| SCIP                                    | 4ff8aff3-f268-4fa1-a331-02a3ad8fc6ff                                                                                                                                                                                              |

# QUINT4-PS/1AC/12DC/15 - Power supply



2904608

<https://www.phoenixcontact.com/us/products/2904608>

## Accessories

### UWA 182/52 - Mounting adapter

2938235

<https://www.phoenixcontact.com/us/products/2938235>



Universal wall adapter for securely mounting the device in the event of strong vibrations. The device is screwed directly onto the mounting surface. The universal wall adapter is attached on the top/bottom.

---

### UWA 130 - Mounting adapter

2901664

<https://www.phoenixcontact.com/us/products/2901664>



2-piece universal wall adapter for securely mounting the device in the event of strong vibrations. The profiles that are screwed onto the side of the device are screwed directly onto the mounting surface. The universal wall adapter is attached on the left/right.

## QUINT4-PS/1AC/12DC/15 - Power supply

2904608

<https://www.phoenixcontact.com/us/products/2904608>



## TWN4 MIFARE NFC USB ADAPTER - Programming adapter

2909681

<https://www.phoenixcontact.com/us/products/2909681>



Near Field Communication (NFC) programming adapter with USB interface for the wireless configuration of NFC-capable products from Phoenix Contact with software. A separate USB driver is not required.

---

## PLT-SEC-T3-230-FM-UT - Type 3 surge protection device

2907919

<https://www.phoenixcontact.com/us/products/2907919>



Type 2/3 surge protection, consisting of protective plug and base element with screw connection. For single-phase power supply network with integrated status indicator and remote signaling. Nominal voltage: 230 V AC/DC

# QUINT4-PS/1AC/12DC/15 - Power supply

2904608

<https://www.phoenixcontact.com/us/products/2904608>



## PLT-SEC-T3-24-FM-UT - Type 3 surge protection device

2907916

<https://www.phoenixcontact.com/us/products/2907916>



Type 3 surge protection, consisting of protective plug and base element, with integrated status indicator and remote signaling for single-phase power supply networks. Nominal voltage: 24 V AC/DC

---

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)